

# ApeosPort®-VII

C7773 / C6673 / C5573 / C4473 / C3373 / C2273

# DocuCentre-VII

C7773 / C6673 / C5573 / C4473 / C3373 / C3372

Unlock your Evolution




# Unlock your Evolution

The ApeosPort-VII / DocuCentre-VII series from Fuji Xerox is designed to accelerate your business evolution, removing technological barriers to allow you greater flexibility to work the way you want to work.

The entire user experience has been redefined, from its clever interactive touch screen and intelligent automated processes, to its seamless integration with cloud services and security features, allowing you powerful control over the creation and distribution of physical and digital documents, as well as predictive management for timely informed decision making.

The ApeosPort-VII / DocuCentre-VII series is at the heart of your pathway to realise enhanced businesses operability and scalability. Welcome to your business evolution.

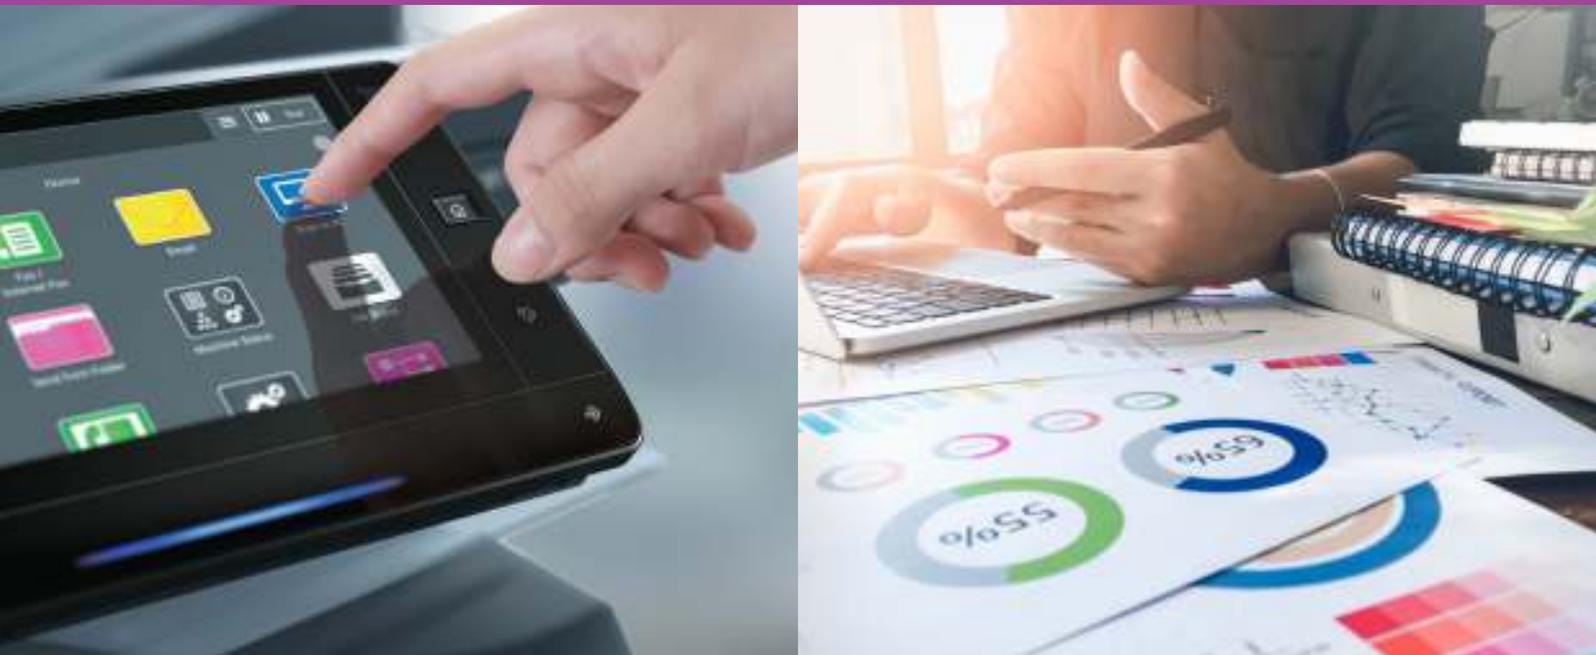

## Intuitiveness simplified

The latest multifunction devices share the same intuitive user interface that you have come to know and understand on your smart devices for simple and immersive user experience.

## Carefree printer management

Let Fuji Xerox proactively manage the health of your print device with access to the right resources and on-time insights, while you focus on your core business.



## ApeosPort-VII

C7773 / C6673 / C5573 / C4473 / C3373 / C2273

## DocuCentre-VII

C7773 / C6673 / C5573 / C4473 / C3373 / C3372

### Copy/Print

Colour/B&W **70** sheets/minute\*1

### Scan

Colour/B&W **270** ppm\*2

### Printing resolution

**1200×2400** dpi\*3

Mobile supported

Wireless LAN supported

\*1: Sheets/minute for C7773, 65 sheets/minute for C6673, 55 sheets/minute for C5573, 45 sheets/minute for C4473, 35 sheets/minute for C3373, 30 sheets/minute for C3372 and 25 sheets/minute for C2273.

\*2: Ppm by single-pass duplex scanning using the Duplex Automatic Document Feeder C2-PC. 154 ppm when using the Duplex Automatic Document Feeder B1-PC.

\*3: Dpi when the document type is set to photo. 600 x 600 dpi for texts, text/photos, and maps.



## 360° data security

Secure data confidentiality, integrity and availability with strong device level encryption, document rights management and potential data backup creation.



## Increase Productivity

As your business evolves, Fuji Xerox solutions and services helps you with your transition smoothly and seamlessly.



## Unlock your Evolution | Intuitiveness simplified

A more connected world is the key philosophy behind Fuji Xerox's pursuit to re-define the user experience – and this is embodied in the ApeosPort-VII/DocuCentre-VII Series.

Incorporating familiar gestures of tap, swipe and select, and customisation to suit your workflow, the redesigned touch panel is your gateway to a new dimension of operability. Easy connectivity options with mobile devices and various cloud services, and a range of smart sensors working in the background to make sure the device is ready to go, when you need it, as you need it.

### All new User Interface (UI)



#### Completely renewed UI panel design

The new UI panel can be operated with a tap and swipe just like a smartphone, adding an intuitive and familiar user experience to device operations. All operations can be completed using a single finger on the 10.1 inch colour touch panel. The improved menu navigation makes finding menu items easy, with fewer steps, improving overall operability.

#### Adjustable UI panel angle

A tilt mechanism has been adopted to enable angle adjustment, enabling the screen to be adjusted to avoid light reflections, or for the user to adjust its angle for an easier view.

#### Advanced operability


##### Colourful and user-friendly

Each function has been cleverly grouped by colour, allowing easy user recognition. Frequently used basic functions are displayed in the coloured area so they can be easily found and actioned.



##### Easy to find and locate

A hierarchy-free screen structure enables the various settings to be checked in a list. Detailed settings can also be specified via tap and swipe operations with a single finger.



#### Support for multiple languages

The device supports multiple languages including Japanese, English, Chinese (simplified/traditional), Korean, Thai, and Vietnamese, and can be easily switched to accommodate different users.

#### Selecting a destination becomes even easier

Destinations can be easily specified from the UI panel when sending a fax, and when sending an email or storing data to your computer when scanning. With the uniform display, only the usable functions and destinations will be displayed according to what you have entered. Even if you are unaccustomed to operating this device, you should be able to specify your destination without worries.

## Mobility

### Near Field Communication (NFC)

The Fuji Xerox ApeosPort / DocuCentre VII series offers NFC technology as a standard, for simplifying the print and scan process. Using NFC technology, a contactless communication can be established between a mobile and the multifunction device.

### Wireless LAN Kit

Adding Wireless LAN kit option, provides customer with a choice of further securing their print environment by providing separate printing options to their guests and employees respectively.

### Print Utility

Fuji Xerox Print Utility enables users to print directly from iOS or Android™ devices, putting mobile printing and scanning convenience at your fingertips. Print stored photo albums, web pages or shoot and print on the go from your iOS or Android™ device. Simply wave your NFC enabled mobile device on the multifunction device to automatically launch Print Utility and you are ready to print or scan.




### Portable UI

Your smartphone (iOS and Android™) can be used as a portable UI panel. Simply set a job on your smartphone and touch the NFC (near field communication) reader of the multifunction device to perform basic operations such as copy, scan and fax (Store to Folder or E-mail).

### Up to 30 favorites can be registered

Portable UI for Business enables up to 30 frequently used sets of settings to be registered as favorites. These settings can be recalled with a single touch. The destination for sending faxes or saving scanned data can also be registered for added convenience.

## Fuji Xerox Cloud Services



### Storage

User CSH (Cloud Service Hub) to connect with your favorite cloud storage. Read more: Page 10



### Direct Print

Use Cloud On-Demand Print feature to directly print from Fuji Xerox cloud server while visiting remote office location. Read more: Page 10



### Document Security

Cloud based solution of Final Code allows user to set document rights at the device itself. Read more: Page 11



### Device Accounting

Users can access Device log management service on web browser to gather usage data and allocate cost to relevant users. Read more: Page 11

## User Friendly Operations

### User friendliness via light and sound

The device cleverly uses light and sound to notify the user of its state. A gentle sound is easily heard over office noise, changing to correctly notify the user of a completed job. The center tray area is equipped with a sensor – a soft blue light flashes while printing and stays lit when printing is completed, signifying a job ready for collection. This reduces information leaks due to unretrieved printed documents.



### Smart WelcomEyes

Sensors installed in the multifunction device detect an approaching user, automatically waking the device from sleep mode. This allows sleep mode to be engaged permanently for excellent energy saving – while ensuring that the device is ready to go, when you need it.

### Document multi-feed detection

The Duplex Automatic Document Feeder (DADF) features an ultrasonic sensor that is capable of detecting overlapping documents feeding incorrectly, preventing scanning errors when copying or scanning multiple documents.

\* Provided for C7773 / C6673 only.

### Widely supporting various paper types

#### From postcards to long paper

The device supports a wide variety of sizes and weights, from envelopes, postcards to long documents up to a maximum of 320 x 1200 mm<sup>\*1</sup>, and from 52 to 300gsm. Long printing<sup>\*2</sup> feature gives the ability to print longer documents such as banners.



\*1: Printable area is 305 x 1194 mm.

\*2: Only supported by the PCL driver and the Adobe® PostScript®3™ driver.

### Retractable paper tray closed with a gentle push

Paper trays are equipped with a retracting mechanism that gently closes the tray without pushing it in all the way.






# Unlock your Evolution | 360° data security

Fuji Xerox proudly defines its holistic security approach on the basic principles of Confidentiality, Integrity and Availability.

The new ApeosPort-VII/DocuCentre-VII Series incorporates security features to combat the significant threats facing the entire information management life cycle; starting at device level with document creation, to setting access rights for document sharing both internally and externally, to creating potential backup plans for all scanned documents for business continuity planning.

## Enriched security in both hardware and software

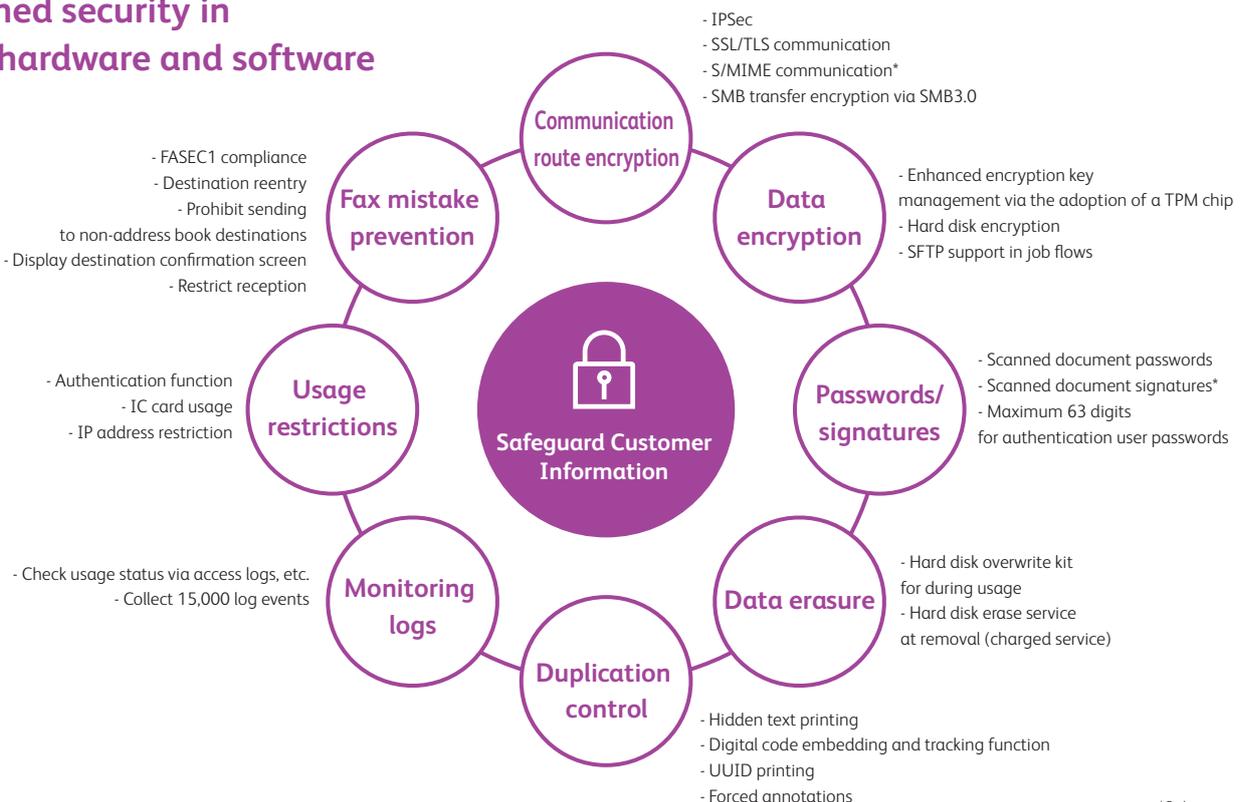

\*Only supported by ApeosPort.

### Server-less authentication

Share user authentication information between multiple multifunction devices without requiring an authentication server. When you register user authentication information and associate it with the IC card ID information, this is stored in the parent ApeosPort-VII/DocuCentre-VII and shares it with linked devices. This makes it easy to use any linked device following authentication procedures, and reduces costs as you do not need a dedicated server.

\* Server-less authentication is an optional feature  
 \* Server-less authentication requires additional IC card reader



### Server-less on-demand printing

If the multifunction device that you set as the output destination is being used, you can redirect your print job to another multifunction device – saving you time, especially when you are in a hurry. Check the status of your print job on the UI panel before printing using the preview displays, or change settings such as the number of copies, colour mode and one-sided/two-sided output, all from the UI panel. This improves document security and reduces waste from unnecessary printing.

\* Server-less on-demand printing is an optional feature


### Secure use of one device by two departments

**An optional extra Ethernet can be added.** With the extra Ethernet, a secure output environment can be created with two separate networks connected to a single device. For example, users can be divided into internal company network users and visitors, or mission-critical system users and office network users. It can even be conveniently and securely used in a shared office.

\* Optional  
 \* Only for SMB transfers with the print function and box job flows. Printer supported protocol is limited to TCP/IP (Ipd, port 9100).


### Image log of transmitted fax document

A simple image log of transmitted fax documents can be retrieved. The same document is automatically transferred to the SMB destination or e-mail destination specified in advance when a fax is sent. By enabling a transmitted fax document image log to be automatically retained, information can be managed, monitored, and tracked without the need to file paper documents. It also reduces the risk of information leaks.

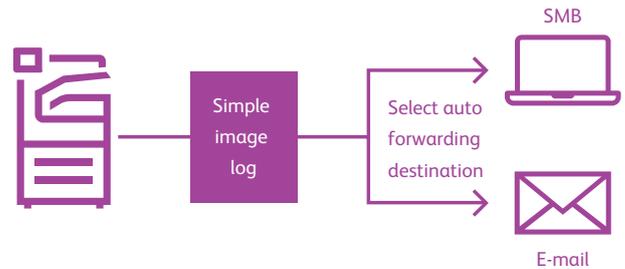


### Secure paperless fax reception

The network that can be used for the device folder where paperless fax documents are saved can now be selected. This enables received fax documents can only be checked with separate networks when using two LANs with a secondary Ethernet or when using two fax lines with a second G3 port.

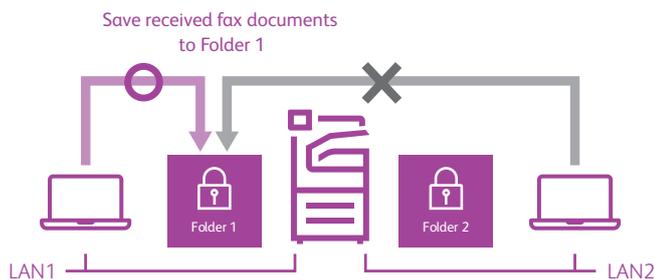

### Support for mixed sizes and multi-send

Customer can use two locations simultaneous scan feature to create potential backups of entire document flow over cloud, assisting them with ever growing need of Business continuity planning. Further, different size originals such as A4 and A3 documents can be scanned at the same time reducing considerable effort and process time.

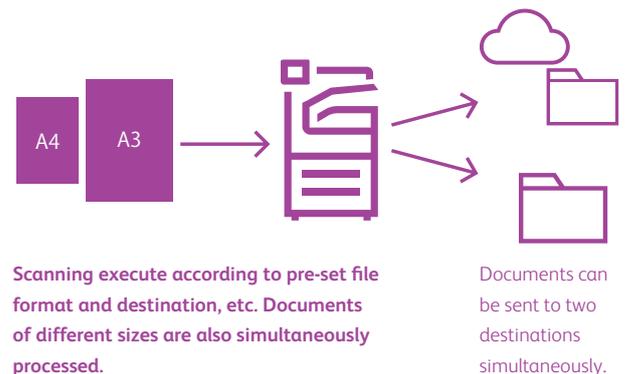

Scanning execute according to pre-set file format and destination, etc. Documents of different sizes are also simultaneously processed.


Documents can be sent to two destinations simultaneously.



# Unlock your Evolution | Increase Productivity


## Cost Control

Total control over your print activities gives you better management over your costs and increases your efficiency. With one-touch user authentication, you can efficiently secure all print activities, preventing unnecessary wastage. User-based tracking, along with different levels of authentication (card, code, log-in), makes you an impenetrable gatekeeper – allowing only authorised users to activate the printer. Program the release of prints only when the authorised user has approached the MFD.

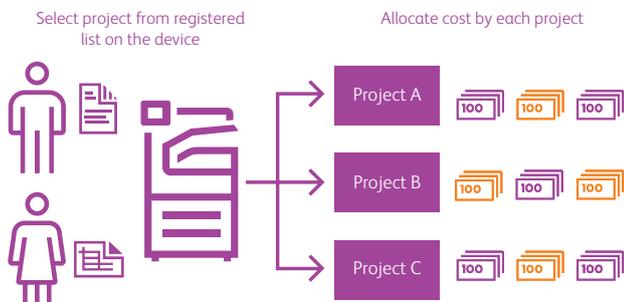


## Automated Workflow

Beyond just automating tasks, Smart Work Gateway is called Smart for a reason. Your multi-function device (MFD) will facilitate the distributed document capture, and with Optical Character Recognition (OCR), document text is digitised. Mobile access and processing are possible from both iOS and Android™ devices—Customise this feature according to your operational workflow and free up valuable time

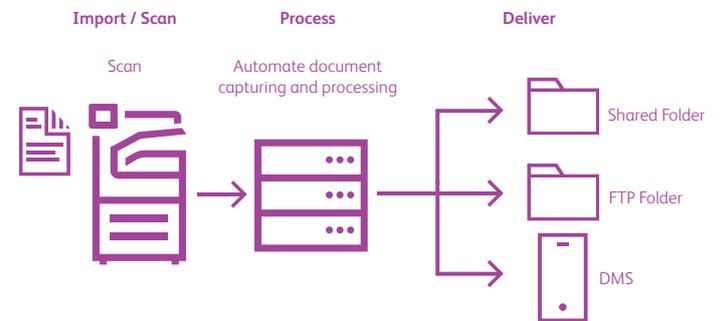

## Security

Smart Work Gateway uses data-centric security and Information Rights Management (IRM) to control the use of, modification and distribution of your content. With the use of IRM, your information has the highest security standards, reducing the risk of information leaks. If confidential information leaks do occur, you can respond swiftly – securing your data and identifying the source of the leak. When integrated with the Fuji Xerox ApeosPort-VII/ DocuCentre-VII, paper documents scanned by the device are secured with the same process as digital documents.

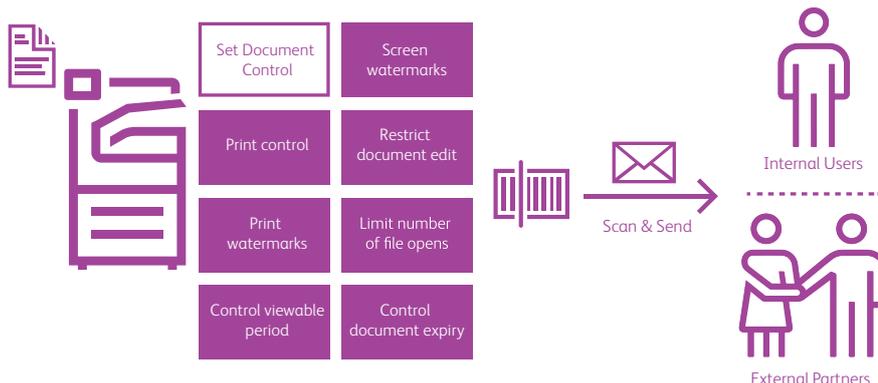

# Intelligent Scanning

## Simple scanning for workflows

**Convert Scanned documents automatically to a pre-specified file format and destination.** Once a file format and destination is registered, select the workflow button and scan the document. Add a file name by adding a document type and date to a user-defined string set on a PC, great for routine work. Efficiency in managing and utilising contracts and bills, etc. is dramatically increased.

\* Optional.

## Smoothly scanning of irregular sizes

Irregular and small size paper documents can be automatically adjusted to the closest standard size just by scanning with the duplex automatic document feeder. Easily scan receipts and order slips without entering each individual document size.


## Various scan functions

### Supporting a wide range of file formats and processes

Emailed or scanned data can be converted to TIFF, JPEG, DocuWorks, PDF, or XPS\*<sup>1</sup> formats. The device also offers OCR processing\*<sup>2</sup> enabling convenient searching. Data size can be compressed to reduce network load, and a password can also be set.

\*<sup>1</sup> An abbreviation for XML Paper Specification.

\*<sup>2</sup> Optional.

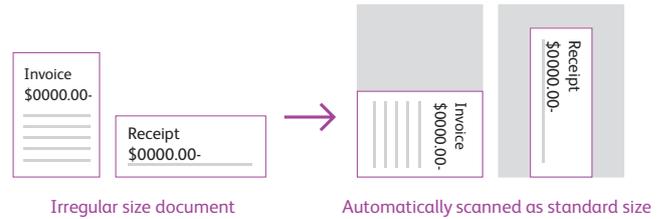

## Even easier personalised scanning

The "ScanAuto" function automatically selects the correct size/simplex/duplex/orientation of your document, simply by pressing the start button. Also, when using the authentication function, your e-mail address is automatically set as the destination just by opening ScanAuto, eliminating the need to enter the destination.

## High-speed scanning of large quantities of documents

The device can scan in duplex at a blistering 270 ppm.\*<sup>1</sup> Up to 250 sheets\*<sup>2</sup> can be loaded in the DADF for scanning.

\*<sup>1</sup>: Ppm for C7773 / C6673. 154 ppm for the C5573 / C4473 / C3373 / C3372 / C2273.

\*<sup>2</sup>: Amount of sheets for C7773 / C6673. 130 sheets for the C5573 / C4473 / C3373 / C3372 / C2273.

# More with less

## The ApeosPort series offers powerful functions that reduce management and enhance security.

### Simpler user authentication

Reduce administrative work by using a server registered with user information for authentication, rather than setting user information on each multifunction device. Restrictions on functions and colour output can be applied\* on a user basis. Additionally, users who are not registered on the server (such as a temporary staff) can also be permitted to use the multifunction device.

\* Requires the separate ApeosWare Management Suite 2 software.

### Further enhanced security

- Importing a device certificate to a multifunction device, digital signatures and encrypted communication based on S/MIME can be performed when sending e-mail/Internet faxes.
- Attaching a digital signature to scanned documents detects modifications and sender falsification can be prevented.

### Image log\*

Image log enables job logs (including user, usage time, number of copies) and the image itself to be stored and managed, enabling prompt investigation should a confidential document be leaked.

\* Optional. Requires separately sold ApeosWare Image Log Management software.

# Green Technology

## Newly-developed Super EA-Eco toner

The device achieves a high resolution output of 1200 x 2400 dpi using the industry's smallest toner particles providing clearer texts, lines and more beautiful halftones.



## Bio-based plastic/recycled plastic


Fuji Xerox multifunction devices adopt bio-based plastic parts using cellulose derived from wood (which reduces CO<sub>2</sub> emissions). Recycled plastics used in some external parts helping to reduce impact on global warming.



## Reducing wasteful paper output

Received faxes can be stored in the device folder instead of being immediately printed. You can decide which faxes need to be printed after checking them on the UI panel.

**Checking faxes while on the move.** Faxes received in the confidential box of the multifunction device can be transferred to a smartphone or tablet device for checking outside of the office.

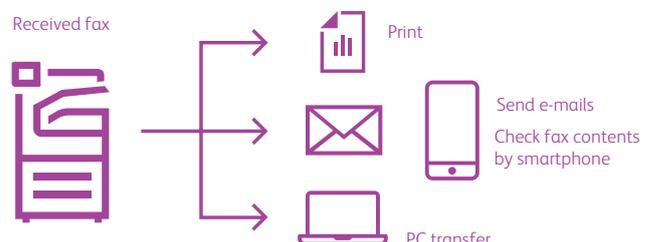

## Further diversified

### Bringing diversity to post-processing.

|   |   |   |   |   |
|---|---|---|---|---|
|  |  |  |  |  |
| <b>Staple</b><br>Stapling multiple pages together                                 | <b>Punch</b><br>Hole punching for binders   | <b>Saddle Staple</b><br>Convenient for making catalogs and booklets               | <b>Z-fold</b><br>Z-folds A3 documents into A4 size                                  | <b>Tri-fold</b><br>Convenient for inserting direct mail, etc.                       |

|                             | Finisher-A2  | Finisher-B3 + Booklet Maker Unit   | C3 Finisher  | C3 Finisher with Booklet Maker   | C3 Finisher with Booklet Maker + Folder Unit CD1                                     |
|-----------------------------|--|--|--|--|--|
|                             |  |  |  |  |  |
| Staple capacity             | 50 sheets <sup>1</sup>   | 50 sheets  | 50 sheets or 65 sheets <sup>2</sup>  | 50 sheets or 65 sheets <sup>2</sup>  | 50 sheets <sup>3</sup> or 65 sheets <sup>23</sup>                                    |
| Punch                       | —  | 2/4 holes or 2/3 holes <sup>4</sup>  | 2/4 holes or 2/3 holes <sup>5</sup>  | 2/4 holes or 2/3 holes <sup>5</sup>  | 2/4 holes or 2/3 holes <sup>5</sup>  |
| Saddle Staple               | —  | ○ <sup>6</sup>   | —  | ○  | ○  |
| Single fold                 | —  | ○ <sup>6</sup>   | —  | ○  | ○  |
| Tri-fold                    | —  | —  | —  | —  | ○ <sup>7</sup>   |
| Z-fold                      | —  | —  | —  | —  | ○ <sup>7</sup>   |
| Paper capacity <sup>8</sup> | Output tray  | —  | 500 sheets   | 500 sheets   | 500 sheets   |
|                             | Finisher tray  | 500 sheets   | 2000 sheets  | 3000 sheets  | 1500 sheets  |

\* Finisher-A2 is compatible with models up to C5573 / C4473 / C3373 / C3372 / C2273.

<sup>1</sup>: A4 size. Up to 30 sheets at B4 or above.

<sup>2</sup>: C3 Finisher Staple Unit 65 sheets required.

<sup>3</sup>: The number of sheets that can be folded is reduced when Z-folding is mixed.

<sup>4</sup>: 2/4 Hole or US 2/3 Hole Punch Kit for Finisher-B3 is required.

<sup>5</sup>: 2/4 Hole or US 2/3 Hole Punch Kit for Finisher-C3 is required.

<sup>6</sup>: Booklet Maker Unit is required. Finisher-B3 makes a crease without folding when performing saddle stapling or double-folding.

<sup>7</sup>: Folder Unit CD1 is required.

<sup>8</sup>: 64 gsm paper/A4 size.

## For users that process a large amount of copy, print, and fax documents

### 3-way output type

Copy, print, and fax jobs can be sorted when output. Tandem Tray and High Capacity Feeder handles user needs for high volume output.



# ApeosPort-VII C7773 / C6673 / C5573 / C4473 / C3373 / C2273 DocuCentre-VII C7773 / C6673 / C5573 / C4473 / C3373 / C3372 Functions & Specifications

## Basic Specifications/Copy Function

| Item                                | Description  |
|-------------------------------------|--|
|                                     | C7773 C6673 C5573 C4473 C3373 C3372 C2273  |
| Type                                | Console  |
| Memory capacity                     | 4 GB (Max: 4 GB)   |
| Hard disk capacity <sup>*1</sup>    | 320 GB or larger (Usable space: 128 GB)  |
| Colour Capability                   | Full Colour  |
| Scan Resolution                     | 600 x 600 dpi  |
| Printing Resolution                 | 1200 x 2400 dpi (High Resolution Photo)<br>600 x 600 dpi (Text / Text-Photo / Photo / Map)   |
| Warm-up Time                        | [When Embedded Plug-ins / Custom Services are enabled <sup>*2</sup> ]<br>36 seconds or less, 30 seconds or less if the main power is on (23 degrees Celsius room temperature)<br>[When Embedded Plug-ins / Custom Services are disabled <sup>*2</sup> ]<br>30 seconds or less, 24 seconds or less if the main power is on (23 degrees Celsius room temperature)  |
| Original Size                       | Maximum of A3, 11 x 17", 297 x 432 mm for both Sheet and Book  |
| Paper Size                          | Max<br>SRA3 (320 x 450 mm), 12 x 18" (305 x 457 mm), A3<br>[12 x 19" (305 x 483 mm), 320 x 483 mm when using Bypass Tray]<br>Min<br>A5, Postcard (100 x 148 mm)[89 x 98 mm when using Bypass Tray]<br>Image loss width <sup>*3</sup><br>Lead edge 4.0 mm, Trail edge 2.0 mm, Right/Left edge 2.0 mm  |
| Paper Weight <sup>*4</sup>          | Paper Tray 52 to 300 gsm<br>Bypass Tray 52 to 300 gsm  |
| First Copy Output Time              |  |
| B/W <sup>*5</sup>                   | 3.3 sec. 3.3 sec. 3.7 sec. 4.4 sec. 4.9 sec. 4.9 sec. 6.3 sec.   |
| Colour <sup>*6</sup>                | 4.1 sec. 4.1 sec. 5.2 sec. 5.7 sec. 6.7 sec. 6.7 sec. 8.7 sec.   |
| Continuous Copy Speed <sup>*7</sup> | A4 LEF / B5 LEF<br>B/W: 70 Colour: 65 B/W: 65 Colour: 65 B/W: 55 Colour: 55 B/W: 45 Colour: 45 B/W: 35 Colour: 35 B/W: 30 Colour: 30 B/W: 25 Colour: 25<br>A4 / B5<br>B/W: 50 Colour: 50 B/W: 47 Colour: 47 B/W: 40 Colour: 40 B/W: 32 Colour: 32 B/W: 27 Colour: 27 B/W: 23 Colour: 23 B/W: 19 Colour: 19<br>B4<br>B/W: 41 Colour: 41 B/W: 38 Colour: 38 B/W: 32 Colour: 32 B/W: 26 Colour: 26 B/W: 23 Colour: 23 B/W: 20 Colour: 20 B/W: 16 Colour: 16<br>A3<br>B/W: 35 Colour: 35 B/W: 32 Colour: 32 B/W: 27 Colour: 27 B/W: 22 Colour: 22 B/W: 19 Colour: 19 B/W: 17 Colour: 17 B/W: 14 Colour: 14 |
| Paper Tray Capacity <sup>*8</sup>   | Standard 4 Tray Model: 500 sheets x 4-tray + Bypass Tray 90 sheets<br>Tandem Tray Model: 500 sheets x 2-tray + 810 sheets + 1175 sheets + Bypass Tray 90 sheets<br>Optional<br>Max HCF B1: 2030 sheets<br>4 Tray Model: 4120 sheets (4 Tray Model + HCF B1)<br>Tandem Tray Model: 5105 sheets (Tandem Tray Model + HCF B1)   |
| Output Tray Capacity <sup>*9</sup>  | Upper Center: 250 sheets (A4 LEF)<br>Lower Center: 250 sheets (A4 LEF)   |
| Power Supply                        | AC220-240 V +/- 10 %, 10 A, 50/60 Hz common  |
| Maximum Power Consumption           | [C7773 / C6673 / C5573 / C4473]<br>2.2 kW (AC220 V +/- 10 %) 2.4 kW (AC240 V +/- 10 %)<br>Sleep Mode: 0.5 W (AC230 V) Ready Mode: 111 W (AC230 V)<br>[C3373 / C3372 / C2273]<br>2.2 kW (AC220 V +/- 10 %) 2.4 kW (AC240 V +/- 10 %)<br>Sleep Mode: 0.5 W (AC230 V) Ready Mode: 75 W (AC230 V)  |
| Dimensions                          | [C7773 / C6673] W 663 x D 793 x H 1169 mm<br>[C5573 / C4473 / C3373 / C3372 / C2273] W 663 x D 723 x H 1141 mm   |
| Weight <sup>*10</sup>               | [C7773 / C6673] 154 kg<br>[C5573 / C4473 / C3373 / C3372 / C2273] 4 Tray Model: 133 kg<br>Tandem Tray Model: 144 kg  |

- \*1 The Storage Hard disk capacity is not totally available for customers.  
\*2 Embedded Plug-ins / Custom Services are enabled as factory default. You can change the settings if needed.  
\*3 Up to A3 size.  
\*4 It is recommended to use Fuji Xerox recommended paper. Correct print output may not be possible depending on the requirement.  
\*5 A4 LEF / Monochrome priority mode.  
\*6 A4 LEF / Colour priority mode.  
\*7 This unit is sheets/minute. The speed may be reduced due to the image quality adjustment.  
\*8 80 gsm paper.  
\*9 64 gsm paper.  
\*10 Excluding Toner Cartridge.

## Print Function

| Item                                     | Description   |
|--|---|
| Type                                     | Built-in type   |
| Continuous Print Speed <sup>*1</sup>     | Same as the Basic Specifications / Copy Function  |
| Printing Resolution                      | Standard [PCL Driver]<br>Standard: 1200 x 2400 dpi, High Quality: 1200 x 2400 dpi, High Resolution: 1200 x 1200 dpi<br>Optional [Adobe® PostScript® 3™ Driver]<br>High Speed (Standard): 600 x 600 dpi, High Quality: 1200 x 2400 dpi, High Resolution: 1200 x 1200 dpi   |
| Page Description Language                | Standard PCL 5 / PCL 6<br>Optional Adobe® PostScript® 3™  |
| Supported Operating System <sup>*2</sup> | Standard [PCL Driver]<br>Windows 10 (32bit), Windows 10 (64bit), Windows 8.1 (32bit), Windows 8.1 (64bit), Windows 7 (32bit), Windows 7 (64bit), Windows Server 2016 (64bit), Windows Server 2012 R2 (64bit), Windows Server 2012 (64bit), Windows Server 2008 R2 (64bit), Windows Server 2008 (32bit), Windows Server 2008 (64bit)<br>[Mac OS X Driver]<br>macOS 10.13 / 10.12, OS X 10.11 / 10.10 / 10.9<br>Optional [Adobe® PostScript® 3™ Driver]<br>Windows 10 (32bit), Windows 10 (64bit), Windows 8.1 (32bit), Windows 8.1 (64bit), Windows 7 (32bit), Windows 7 (64bit), Windows Server 2016 (64bit), Windows Server 2012 R2 (64bit), Windows Server 2012 (64bit), Windows Server 2008 R2 (64bit), Windows Server 2008 (32bit), Windows Server 2008 (64bit)<br>macOS 10.13 / 10.12, OS X 10.11 / 10.10 / 10.9 |
| Interface                                | Standard Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T, USB3.0  |

- \*1 The speed may be reduced due to the image quality adjustment. The printing speed may be reduced depending on the document.  
\*2 Please refer to our official website for the latest supported OS.

## Scan Function ( Optional )

| Item            | Description   |
|-----------------|---|
| Type            | Colour Scanner  |
| Scan Resolution | 600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi, 200 x 200 dpi      |
| Scan Speed      | Same as the Scan Speed for the Duplex Automatic Document Feeder |
| Interface       | Standard Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T            |

## Fax Function ( Optional )

| Item                 | Description  |
|----------------------|--|
| Original Size        | Max: A3, 11 x 17", Long document (Longest 600 mm)  |
| Recording Paper Size | Max: A3, 11 x 17"<br>Min: A5   |
| Transmission Time    | 2 seconds and more but fewer than 3 seconds <sup>*1</sup>  |
| Transmission Mode    | ITU-T G3   |
| Applicable Lines     | Telephone subscriber line, PBX, Fax communication (PSTN), Maximum 3 ports <sup>*2</sup> (G3-3 ports) |

- \*1 When A4 size document with approximately 700 characters is transmitted in standard image-quality (8 x 3.85 lines/mm) and in high-speed mode (28.8 kbps or faster, JBIG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the contents of the document, the type of machine receiving the fax, and line condition.  
\*2 No. of FAX lines is up to 3 ports. Port refers to number of channels for FAX.

## Duplex Automatic Document Feeder B1-PC

| Item                         | Description   |
|------------------------------|---|
|                              | C5573 C4473 C3373 C3372 C2273   |
| Original Size / Paper Weight | Max: A3, 11 x 17"; Min: A5 <sup>*1</sup><br>38 to 128 gsm (In Duplex: 50 to 128 gsm)  |
| Capacity <sup>*2</sup>       | 130 sheets  |
| Scan Speed <sup>*3</sup>     | Copy (A4 LEF Simplex)<br>B/W: 55 sheets/minute<br>Colour: 55 sheets/minute<br>Scan<br>B/W: 80 sheets/minute, Colour: 80 sheets/minute<br>(1 pass, 2 sided scanning: B/W: 154 ppm <sup>*4</sup> , Colour: 154 ppm <sup>*4</sup> )<br>[Fuji Xerox Standard Paper (A4 LEF), 200 dpi, to Folder.] |

- \*1 The minimum custom size is 125 x 85 mm.  
\*2 64 gsm paper.  
\*3 The scanning speed varies depending on the documents.  
\*4 160 ppm for both B/W and colour when Quiet Mode is disabled. This setting can be changed to suit the customer's usage.

## Duplex Automatic Document Feeder C2-PC

| Item                         | Description   |
|------------------------------|---|
|                              | C7773 C6673   |
| Original Size / Paper Weight | Max: A3, 11 x 17"; Min: A6 <sup>*1</sup><br>38 to 200 gsm (In Duplex: 50 to 200 gsm)  |
| Capacity <sup>*2</sup>       | 250 sheets  |
| Scan Speed <sup>*3</sup>     | Copy (A4 LEF Simplex)<br>B/W: 70 sheets/minute<br>Colour: 70 sheets/minute<br>Scan<br>B/W: 135 sheets/minute, Colour: 135 sheets/minute<br>(1 pass, 2 sided scanning: B/W: 270 ppm, Colour: 270 ppm)<br>[Fuji Xerox Standard Paper (A4 LEF), 200 dpi, to Folder.] |

- \*1 The minimum custom size is 84 x 139.7 mm.  
\*2 64 gsm paper.  
\*3 The scanning speed varies depending on the documents.

## HCF B1 ( Optional )

| Item                               | Description                |
|------------------------------------|----------------------------|
| Paper Size                         | A4 LEF, Letter LEF, B5 LEF |
| Paper Weight                       | 55 to 216 gsm              |
| Feeding Capacity / Number of Tray* | 2030 sheets x 1-tray       |
| Dimensions                         | W 389 x D 610 x H 380 mm   |
| Weight                             | 29 kg                      |

\*80 gsm paper.

## Envelope Tray ( Optional )

| Item                               | Description   |
|------------------------------------|---|
| Paper Size                         | DL LEF, ISO-C4, ISO-C5 LEF, ISO-C6 LEF, Commercial #10 LEF, Monarch7.3/4 LEF<br>Custom Size: 241 x 372 mm to 90 x 98 mm |
| Paper Weight                       | Envelope: 75 to 90 gsm, Postcard (Japan Post): 106 to 220 gsm   |
| Feeding Capacity / Number of Tray* | 50 sheets x 1-tray  |
| Dimensions                         | W 620 x D 566 x H 87 mm   |
| Weight                             | 3 kg  |

\*Commercial #10 paper.

## Side Tray

| Item            | Description              |
|-----------------|--------------------------|
| Paper Capacity* | 100 sheets               |
| Dimensions      | W 324 x D 567 x H 228 mm |

\*64 gsm paper.

## Finisher-A2 ( Optional )

| Item                         | Description   |  |
|------------------------------|---|--|
| Type                         | Sort (Offset available) <sup>*1</sup> / Stack (Offset available) <sup>*1</sup>  |  |
| Paper Size                   | Max: A3, 11 x 17"; Min: A5, Postcard (100 x 148 mm)   |  |
| Paper Weight <sup>*2</sup>   | 52 to 256 gsm   |  |
| Paper Capacity <sup>*3</sup> | Finishing Tray [Without Stapling]<br>A4 LEF: 500 sheets, B4: 250 sheets, A3 or larger: 200 sheets, Mixed Size Stacking <sup>*4</sup> : 250 sheets<br>[With Stapling]<br>30 sets or A4 LEF: 500 sheets, B4: 250 sheets, A3 or larger: 200 sheets, Mixed Size Stacking <sup>*4</sup> : 250 sheets |  |
| Staple                       | Capacity  | A4: 50 sheets (90 gsm or less)<br>B4 or larger: 30 sheets (90 gsm or less) |
|                              | Paper Size  | Max: A3, 11 x 17"<br>Min: B5 LEF   |
|                              | Position  | Single stapling, Dual stapling   |
| Dimensions                   | W 478 x D 461 x H 238 mm  |  |
| Weight                       | 11 kg   |  |

\* Note: The unit cannot be installed on ApeosPort-VII C7773/C6673.

\*1 [No Offset] is selected by factory default. The settings can be changed according to the customer's use situation.

\*2 Documents may not be printed correctly depending on usage conditions. (52 to 55 gsm)

\*3 64 gsm paper.

\*4 When larger size sheets are stacked on top of smaller size sheets. 250 sheets when large size sheets are smaller than A3. 200 sheets when large size sheets are A3 or larger.

The same applies to when staple-free and stapled bindings are mixed or different stapling positions are mixed.

## Finisher-B3 ( Optional )

| Item                            | Description  |   |
|---------------------------------|--|---|
| Type                            | Sort (Offset available) <sup>*1</sup> / Stack (Offset available) <sup>*1</sup> <sup>*2</sup>   |   |
| Paper Size <sup>*3</sup>        | Max: A3, 11 x 17"; Min: A5   |   |
| Paper Weight <sup>*4</sup>      | 52 to 300 gsm  |   |
| Paper Capacity <sup>*5</sup>    | [Without Stapling]<br>A4: 2000 sheets, B4 or larger: 1000 sheets, Mixed Size Stacking <sup>*6</sup> : 300 sheets<br>[With Stapling]<br>A4: 100 sets or 1000 sheets <sup>*7</sup> , B4 or larger: 75 sets or 750 sheets<br>[With Booklet Finishing <sup>*8</sup> ]<br>50 sets or 600 sheets<br>[With Fold <sup>*9</sup> ]<br>500 sheets |   |
| Staple                          | Capacity   | 50 sheets (90 gsm or less)  |
|                                 | Paper Size   | Max: A3, 11 x 17"<br>Min: A5 LEF  |
|                                 | Paper Weight   | 52 to 256 gsm   |
|                                 | Position   | Single stapling, Dual stapling  |
| Punch <sup>*9</sup>             | Number of Holes  | 2-hole / 4-hole punch or 2-hole / 3-hole punch (US Specifications)  |
|                                 | Paper Size   | A3, 11 x 17"; B4 <sup>*10</sup> , A4 <sup>*11</sup> , A4 LEF, Letter <sup>*11</sup> , Letter LEF, B5 <sup>*11</sup> , B5 LEF <sup>*10</sup> , A5 <sup>*11</sup> , A5 LEF <sup>*11</sup> |
|                                 | Paper Weight   | 52 to 220 gsm   |
| Booklet Finishing <sup>*8</sup> | Capacity   | Saddle Staple: 15 sheets<br>Single Fold: 5 sheets   |
|                                 | Paper Size   | Max: A3, 11 x 17"<br>Min: A4, Letter  |
|                                 | Paper Weight   | Saddle Staple: 64 to 80 gsm <sup>*12</sup><br>Single Fold: 64 to 105 gsm  |
| Dimensions <sup>*13</sup>       | W 592 x D 653 x H 1041 mm<br>With Booklet Finisher: W 592 x D 673 x H 1079 mm  |   |
| Weight                          | 25 kg<br>With Booklet Finisher: 35 kg  |   |

\*1 The offset feature is set to disabled by factory default. The setting can be changed as necessary.

\*2 Outputs whose weight is 257 gsm and more or width is less than 210 mm are delivered without offset stacking.

\*3 Paper in the sizes larger than A3 or 11 x 17" or smaller than A5 are delivered to the Centre Tray.

\*4 Documents may not be printed correctly depending on usage conditions. (52 to 55 gsm, 257 gsm and more)

\*5 64 gsm paper.

\*6 When larger size sheets are stacked on top of smaller size sheets.

\*7 75 sets or 750 sheets with dual stapling.

\*8 The Booklet Finishing function requires the optional Booklet Maker Unit for Finisher-B3. After a job with the Booklet Finishing function specified has been output, the next job may not be delivered until the sheets are removed from the output tray. Also, if larger size sheets are stacked on top of smaller size sheets after a job with the Booklet Finishing function specified has been run, the next job may not be delivered until the sheets are removed from the output tray.

\*9 The Punch function requires the optional 2/4 Hole Punch Kit for Finisher-B3 or US 2/3 Hole Punch Kit for Finisher-B3.

\*10 4-hole punch is not applicable.

\*11 3-hole, 4-hole punch is not applicable.

\*12 Covers can be up to 220 gsm (Extra Heavyweight).

\*13 Inner connector within the body is excluded.

## C3 Finisher / C3 Finisher with Booklet Maker ( Optional )

| Item                         | Description     |   |
|------------------------------|-----------------|---|
|                              | C3 Finisher     | C3 Finisher with Booklet Maker  |
| Type                         | Output Tray     | Sort / Stack  |
|                              | Finishing Tray  | Sort (Offset available) / Stack (Offset available)  |
|                              | Booklet Tray    | - / Sort / Stack  |
| Paper Size                   | Output Tray     | Max: 12 x 19" (305 x 483 mm)<br>Min: Postcard (100 x 148 mm)  |
|                              | Finishing Tray  | Max: 12 x 19" (305 x 483 mm)<br>Min: B5 LEF   |
| Paper Weight                 | Output Tray     | 52 to 300 gsm <sup>*1</sup>   |
| Paper Capacity <sup>*2</sup> | Finishing Tray  | [Without Stapling]<br>A4: 3000 sheets, B4 or larger: 1500 sheets, Mixed Size Stacking <sup>*3</sup> : 300 sheets<br>[With Stapling]<br>A4: 200 sets or 3000 sheets, B4 or larger: 100 sets or 1500 sheets, Mixed Size Stacking <sup>*3</sup> : 70 sets or 200 sheets  |
|                              | Booklet Tray    | -   |
|                              | Staple          | Capacity  |
| Staple                       | Paper Size      | Max: A3, 11 x 17"<br>Min: B5 LEF  |
|                              | Paper Weight    | 52 to 300 gsm   |
|                              | Position        | Single stapling, Dual stapling  |
| Punch <sup>*6</sup>          | Number of Holes | 2-hole / 4-hole punch or 2-hole / 3-hole punch (US Specifications)  |
|                              | Paper Size      | A3, 11 x 17", B4, A4 <sup>*9</sup> , A4 LEF, Letter <sup>*9</sup> , Letter LEF, B5 LEF, 7.25 x 10.5" (184 x 267 mm) LEF, 8 x 10" (203 x 254 mm), 8 x 10" (203 x 254 mm) LEF, 16K (194 x 267 mm) LEF, Cover A4 (223 x 297 mm) LEF, 9 x 11" (229 x 279 mm) LEF, 215 x 315 mm, 8.5 x 13" (216 x 330 mm), Legal, 11 x 15" (279 x 381 mm), 8K (267 x 388 mm) |
|                              | Paper Weight    | 52 to 220 gsm   |
| Booklet Finishing            | Capacity        | - / Saddle Staple: 16 sheets (90 gsm or less) <sup>*8</sup><br>Single Fold: 5 sheets (90 gsm or less) <sup>*8</sup>   |
|                              | Paper Size      | - / Max: SRA3 (320 x 450 mm), 12 x 18" (305 x 457 mm)<br>Min: B5  |
|                              | Paper Weight    | - / Saddle Staple: 60 to 300 gsm<br>Single Fold: 60 to 300 gsm  |
| Dimensions <sup>*9</sup>     |                 | W 730 x D 589 x H 1056 mm<br>When Folder Unit CD1 is installed: W 965 x D 726 x H 1056 mm   |
|                              |                 | W 790 x D 589 x H 1056 mm<br>When Folder Unit CD1 is installed: W 1025 x D 726 x H 1056 mm  |
| Weight                       |                 | 49 kg<br>When Folder Unit CD1 is installed: 101 kg  |
|                              |                 | 66 kg<br>When Folder Unit CD1 is installed: 118 kg  |

\* Note: Transport Unit H3 is required.

\*1 52 to 55 gsm output paper may not be aligned properly depending on the paper type.

\*2 64 gsm paper.

\*3 When larger size sheets are stacked on top of smaller size sheets.

\*4 When the output paper size is the same.

\*5 Up to 65 sheets can be stapled when the C3 Finisher Staple Unit 65 Sheets is installed. However, depending on the paper type, incorrect stapling such as uneven edge alignment of sets may occur.

\*6 Optional.

\*7 3-hole punch is not applicable.

\*8 The maximum number of sheets varies depending on the paper weight. Booklet may not be tightly closed depending on the size or type of the paper.

\*9 Inner connector within the body is excluded.

## Folder Unit CD1 ( Optional )

| Item                      | Description   |                  |
|---------------------------|---|------------------|
| Z Fold                    | Paper Size  | A3, 11 x 17"; B4 |
|                           | Paper Weight  | 60 to 90 gsm     |
|                           | Sheet   |                  |
| Tri-fold                  | Paper Size  | A4, Letter       |
|                           | Paper Weight  | 60 to 90 gsm     |
|                           | Paper Capacity <sup>*1</sup>                              | 40 sheets        |
| Power Supply              | AC220-240 V +/- 10%, 0.6 A, 50/60 Hz common <sup>*2</sup> |                  |
| Maximum Power Consumption | 144 W (AC220-240 V +/- 10%)                               |                  |
| Dimensions                | W 232 x D 726 x H 991 mm                                  |                  |
| Weight                    | 53 kg   |                  |

\* Note: Optional of C3 Finisher / C3 Finisher with Booklet Maker.

\*1 64 gsm paper.

\*2 Power supply separate from the main unit is required.

### Notes

- 1) If the storage media (such as hard disk drives) of the base unit fail, loss of received data, accumulated data, registered setting data, etc. may occur. In no event shall Fuji Xerox be liable for any damages whatsoever arising from loss of data.
- 2) Functional spare parts will be available for at least 7 years after the product is no longer manufactured.

**astragraphia**  
member of **ASTRA**



Let's Be Friends ☺



astragraphia document solution



@astragraphia\_ds @astragraphiadocsol